


# VÁLVULA DE RETENCIÓN EN LÍNEA VRL/VRL2 /Check valves



VRL

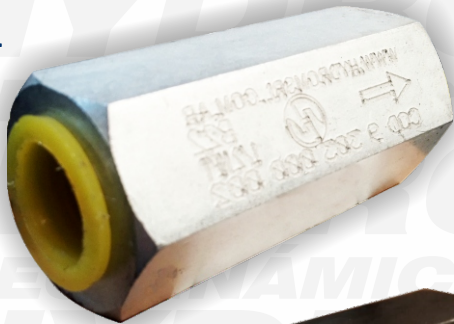

VRL2



## Especificaciones Técnicas/Technical Specifications

| Tamaño/size                                          | 6                                                                                    | 8    | 10   | 15   | 20  | 25     | 30     |
|------------------------------------------------------|--------------------------------------------------------------------------------------|------|------|------|-----|--------|--------|
| Conexión /Threaded connection                        | 1/4"                                                                                 | 3/8" | 1/2" | 3/4" | 1"  | 1 1/4" | 1 1/2" |
| Caudal (L/min)/Max. flow rate (L/min)                | 15                                                                                   | 30   | 60   | 120  | 200 | 300    | 400    |
| Presión de trabajo (MPa)/Max. operating pressure     | 31.5                                                                                 |      |      |      |     |        |        |
| Distancia entre caras(mm)/Distance across flats (mm) | 19                                                                                   | 24   | 30   | 36   | 46  | 60     | 63     |
| Largo (mm)/Length (mm)                               | 58                                                                                   | 58   | 72   | 85   | 98  | 120    | 132    |
| Peso (Kg)/Weight (Kg)                                | 0.1                                                                                  | 0.2  | 0.3  | 0.5  | 1   | 2.1    | 2.5    |
| Tratamiento Superficial/Surface tratment             | Cuerpo de acero, superficie negra o Cincada /Steel Body Surface Black Oxide, or Zinc |      |      |      |     |        |        |
| Limpieza de Aire necesaria/ Oil Cleanliness          | NAS1638 class 9 and ISO4406 class 20/18/15                                           |      |      |      |     |        |        |

## Introducción/ Introduction

La Válvula de retención en línea permiten el libre flujo aceite en un sentido y bloquean en la dirección opuesta/ check valves allow free flow in one direction and block flow in the counter direction.

## Dimensiones de las Roscas /Threaded connection dimensions

| Tamaño /Size | 6    | 8    | 10   | 15   | 20  | 25     | 30     |
|--------------|------|------|------|------|-----|--------|--------|
| D1           | 1/4" | 3/8" | 1/2" | 3/4" | 1"  | 1 1/4" | 1 1/2" |
| ØD2          | 19   | 24   | 30   | 36   | 46  | 60     | 60     |
| H1           | 21.5 | 27   | 34   | 40.5 | 53  | 69     | 75     |
| L1           | 58   | 58   | 72   | 85   | 98  | 120    | 132    |
| L2           | 1.5  | 1.5  | 1.5  | 1.5  | 1.5 | 1.5    | 1.5    |
| T1           | 12   | 12   | 14   | 16   | 18  | 20     | 22     |
| SW           | 19   | 24   | 30   | 36   | 46  | 60     | 65     |

